



DESCRIPTIONS



Capacity: 15 x 1/1 GN - 60x40



Trays insertion: Crosswise



Dimensions: 790 x 830 x H 1790 mm



Control panel: Semi Touch



Positive cycle: 48 kg
Negative cycle: 32 kg

GAS

R404A (until end of 2019)
R452A (from 2020)

Climate class

Class **N**

Insulation thickness: 60 mm







Refrigerant power: 2.303 kW



Electric power: 1.360 kW

CONTROL PANEL DESCRIPTION



 CHILL	Blast chilling key
 FREEZE	Deep freezing key
 HARD	Hard blast chilling or Soft deep freezing key
 MENU	Decrease value key
 AUX	Increase value key
 START	Start/stop key

MANUFACTURING FEATURES




- Time or core probe control
- Internal glossy finish
- External scotch-brite finish
- 60 mm high density polyurethane foam insulation, CFC and HCFC-free
- Core probe included
- Removable grids-rack for easy cleaning
- Air condensation
- Electric defrosting
- Automatic cold holding at the end of cycle

DIMENSIONS

	BLAST CHILLER	PACKAGE
Width	790 mm	mm
Depth	830 mm	mm
Height	1790 mm	mm
Weight/volume		190 kg/1.43 m ³

POWER SUPPLY

Power loading	1.360 kW
Cooling power	2.303 kW
Max. power loading	1.360 kW
Voltage	400 V 3N 50 Hz
Feed cable section	5 x 1,5 mm ²
Capacity	15 x 1/1 GN - 60x40
Pitch between the trays	67 mm

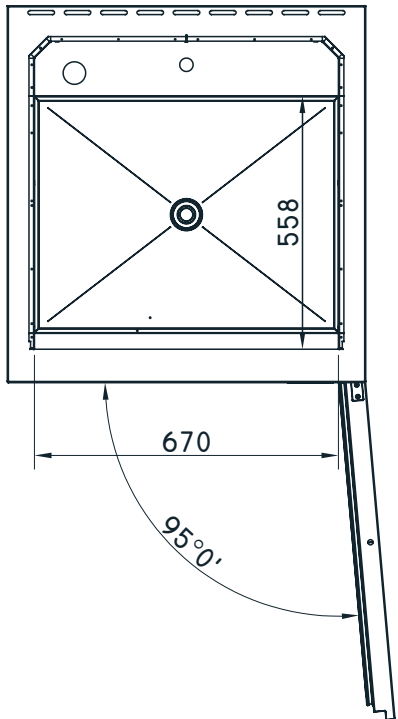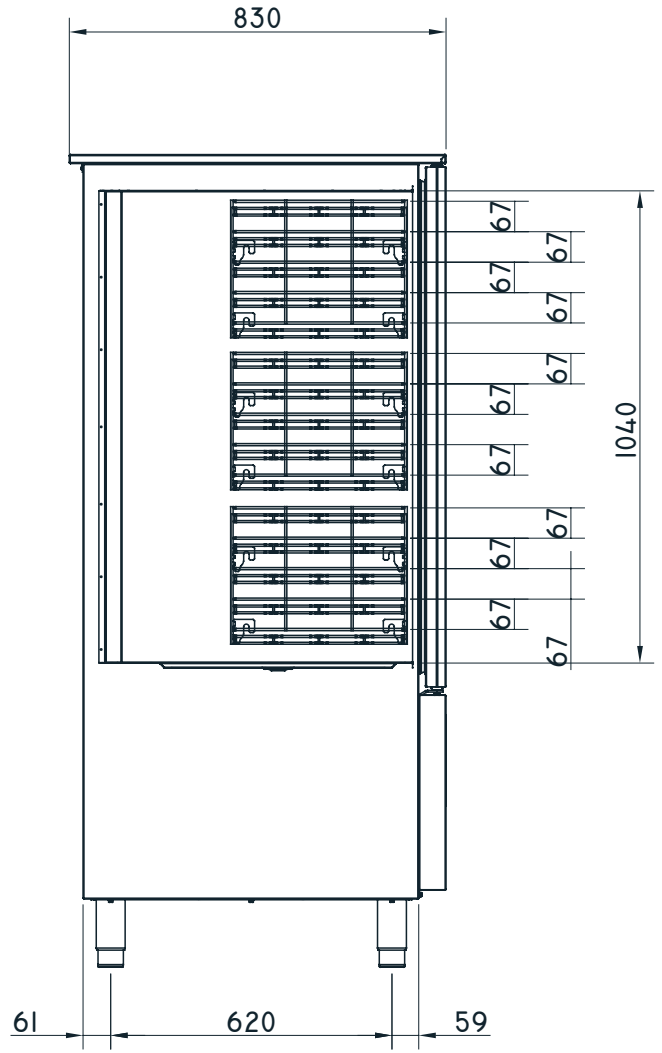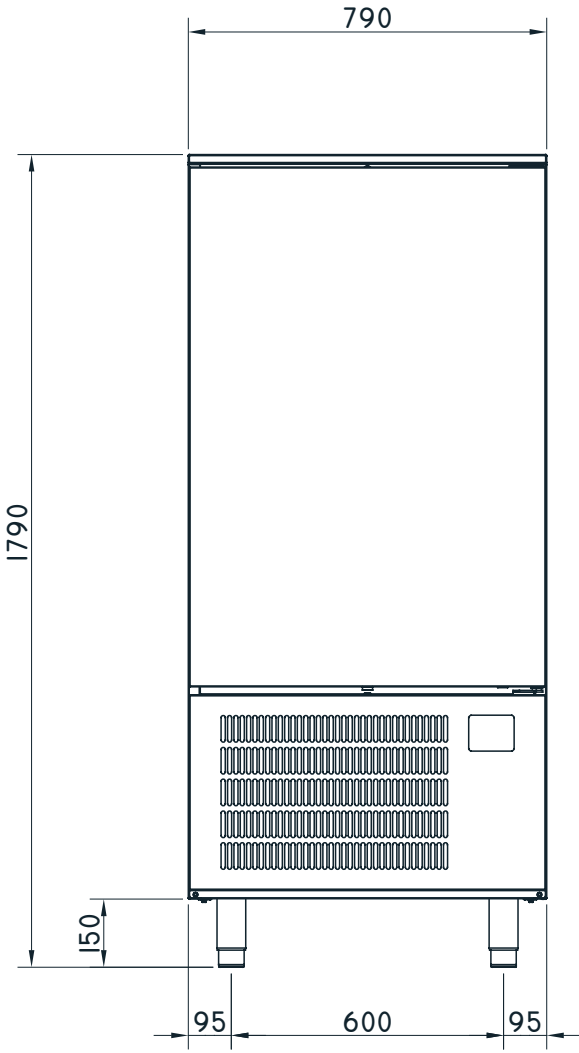

The manufacturer declines all responsibility due to errors and/or misprints.