

EME102X

Convection Electric Oven - 10 (GN 1/1_ 60x40)



TECHNICAL FEATURES


- Heating of cooking chamber with high performance INCOLOY heating elements.
- Adjustable fan speed in 2 position.
- Double-glazed ventilated door (panels can be opened for easy cleaning).
- AISI 304 cooking chamber with rounded corners.
- Height adjustable feet.
- Reversing motor rotation for even cooking
- Interior light.
- Extra power version
- Humidifier

OPTIONS:

- Optional rack for 60x40 trays.


USER INTERFACE:

ELECTROMECHANICAL CONTROL PANEL

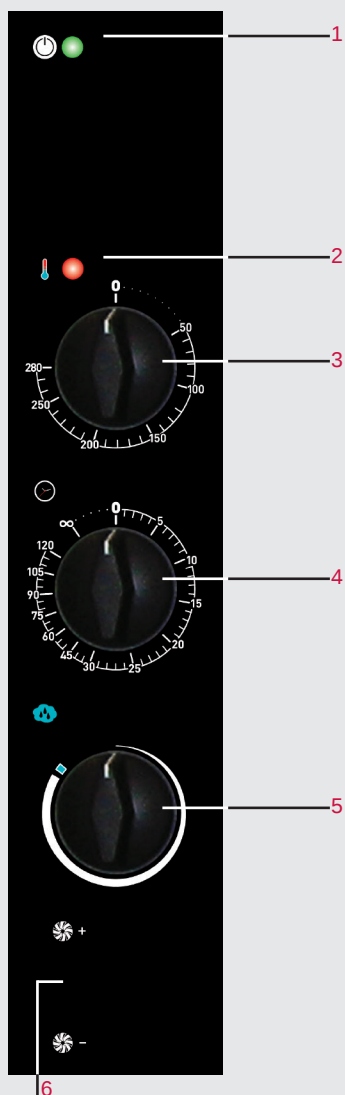

1. Power-on light.
2. Heating-on light
3. Thermostat
 - Temperature control from 50° to 280°C
4. Timer
 - Time control from 1' to 120' + infinite position.
5. Humidifier
6. Two fan speed switch

Easyair: an oven line suitable to take either gastronorm and confectionery size trays and containers.

 (A x B x C) mm	VOL./PESO Vol./Weight m ³ /kg	VAC 400V-3N 50Hz (60 Hz optional) kW	POTENZA EL. CAMERA Oven cavity el. power kW	DISTANZA TRA LE TEGLIE Distance between the layers mm	DIM. CAMERA Cavity net dimension mm
870x749x1023 10 GN 1/1 10 EN 60x40	0,9 / 110	17,3	16,6	74	645x800x450

ACCESSORIES

- Stand TSP1000
- Racks for stand TSP1000 cod. 2017692
- Proofer CLP0810
- Proofer CL900
- Proofer CL912
- Hood 7080516
- Condensation hood 7080522
- Hand spray 7080003





ACCESSORIES FOR PATISSERIE USE

- 2023818 racks 60x40 size 74.
- 2020080 racks 60x40 size 96

- A Electrical connection
B Water inlet (G3/4)
C Drain connection (Ø32)

WATER QUALITY REQUIREMENTS

Hardness	60-100 ppm
TDS	<100 mg/L
PH Value	7.0-8.0
Cl ₂ Free chlorine.....	<0,5 mg/L
Cl Chloride.....	<20 mg/L
Alkalinity.....	<20 mg/L
SiO ₂ Silica.....	<10 mg/L

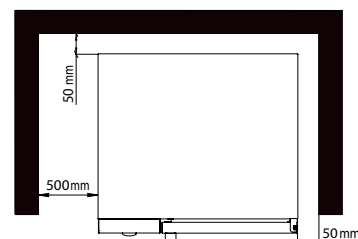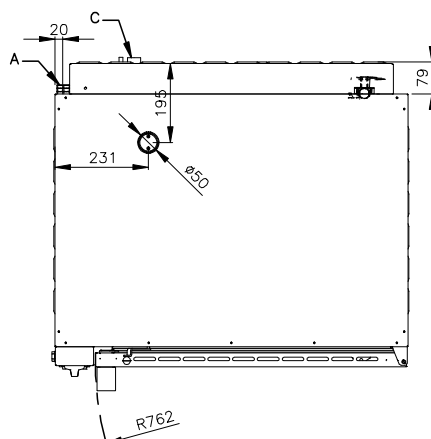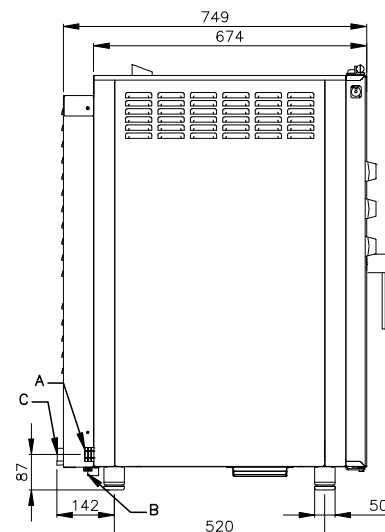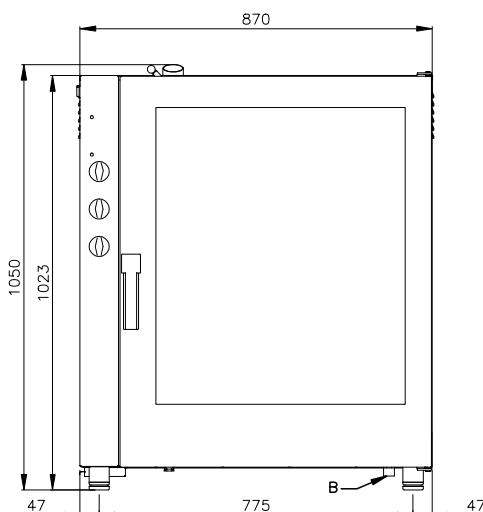

* Clearance requirements

NOTE

* Drain line must be vented