

EME5232X

Convection Electric Oven - 5 GN 2/3




TECHNICAL FEATURES

- Heating of cooking chamber with high performance INCOLOY heating elements.
- Adjustable fan speed in 2 position.
- Double-glazed ventilated door (panels can be opened for easy cleaning).
- AISI 304 cooking chamber with rounded corners.
- Height adjustable feet.
- Reversing motor rotation for even cooking
- Interior light.
- Extra power version
- Humidifier


USER INTERFACE:

ELECTROMECHANICAL CONTROL PANEL

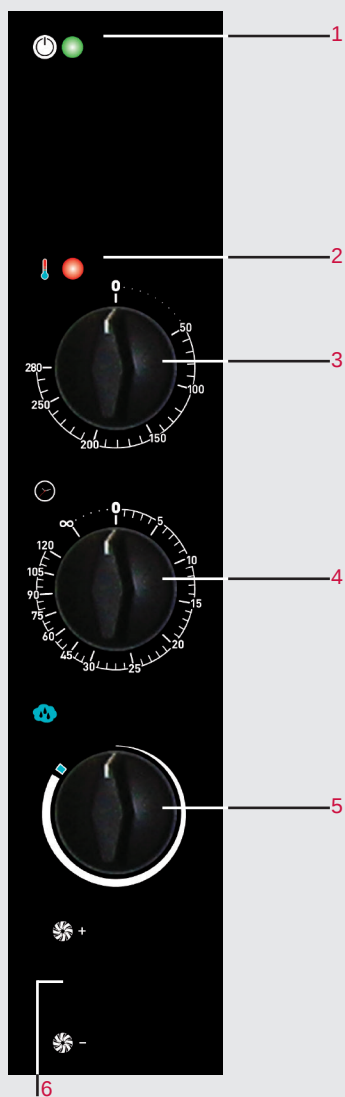




1. Power-on light.
2. Heating-on light
3. Thermostat.
 - Temperature control from 50° to 280°C
4. Timer
 - Time control from 1' to 120' + infinite position.
5. Humidifier
6. Two fan speed switch

EME5232X
Convection Electric Oven - 5 GN 2/3

 (A x B x C) mm	VOL./PESO Vol./Weight m ³ /kg	VAC 400V-3N 50Hz (60 Hz optional) kW	POTENZA EL. CAMERA Oven cavity el. power kW	DISTANZA TRA LE TEGLIE Distance between the layers mm	DIM. CAMERA Cavity net dimension mm
600x700x660 5 GN 2/3	0,45 / 53	4,8	4,5	74	375x420x390

ACCESSORIES


- Proofer CL600
- Hand spray 7080003

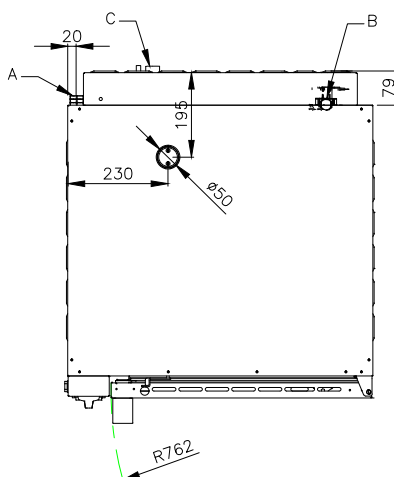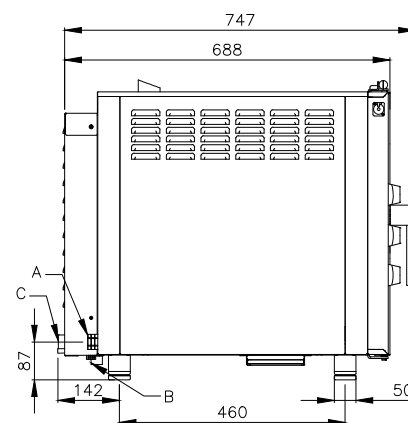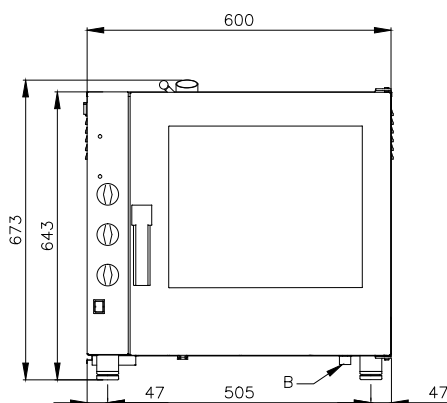

- A Electrical connection
- B Water inlet (G3/4)
- C Drain connection (Ø32)

WATER QUALITY REQUIREMENTS

Hardness 60-100 ppm
 TDS <100 mg/L
 PH Value 7.0-8.0
 Cl₂ Free chlorine..... <0,5 mg/L
 Cl Chloride..... <20 mg/L
 Alkalinity..... <20 mg/L
 SiO₂ Silica..... <10 mg/L

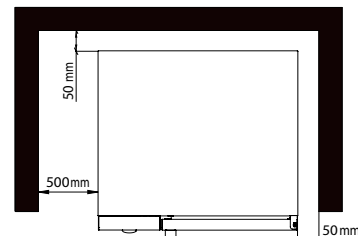

* Clearance requirements

NOTE

* Drain line must be vented