

FMG741GX

## GAS FRY TOP WITH OPEN UNIT, SMOOTH/RIBBED COMPOUND PLATE



- Steel unit
- 1.2mm thick pressed top lowered by 3cm compared to the work surface
- Height-adjustable cooktop (850-900 mm)
- Built-in plate for even cooking and ease of cleaning
- Smooth/ribbed Duplex2304 plate
- Top with drain hole and pressed fat collector GN1/3
- · Shaped instrument panel with controls tilted toward the operator
- Heated by a two-branch steel burner with stabilised flame and 4 flame lines for each area
- · Gas controlled by a safety thermostatic valve with cut-out
- Manually controlled temperature
- Automatic piezoelectric ignition
- Cooking surface 330x470mm
- Open steel base
- Stainless steel height-adjustable feet

## General technical data

Dimensions:	(mm	800x700x900
-------------	-----	-------------


Volume: (m<sup>3</sup>) 0,9


Weight:: (Kg) **120** 

## **Gas connection**

kW		14

UNI ISO 7\1 R 1/2"

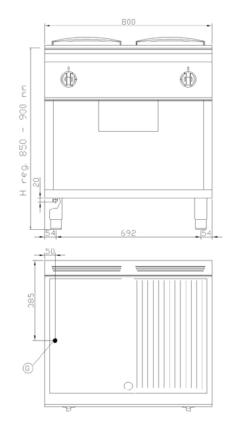



(G) GAS INLET
(E) ELECTRICAL PLUG
(A) WATER INLET
(C) HOT WATER INLET
(F) COLD WATER INLET
(S) WATER DRAIN