

FMG941GX
**GAS FRY TOP WITH OPEN UNIT, SMOOTH/RIBBED DUPLEX
 2304 SINGLE PLATE**


- Steel unit
- 2 mm thick pressed top lowered by 3cm compared to the work surface
- Height-adjustable cooktop (850-900 mm)
- Built-in plate for even cooking and ease of cleaning.
- Smooth/ribbed Duplex 2304 plate.
- Top with drain hole and pressed fat collector GN1/2
- Shaped instrument panel with controls tilted toward the operator
- Heated by a two-branch steel burner with stabilised flame and 4 flame lines for each area
- Gas controlled by a safety thermostatic valve with cut-out
- Temperature controlled thermostatically from 110 to 280 °C
- Safety thermostat in case of malfunction of the operating thermostat
- Automatic piezoelectric ignition
- Cooking surface 330x645mm
- Open steel base
- Stainless steel height-adjustable feet

General technical data

Dimensions: (mm) **800x900x900**


Volume: (m³) **0,9**

Weight:: (Kg) **175**

Gas connection

kW **18**

UNI ISO 7\1 R 1/2"

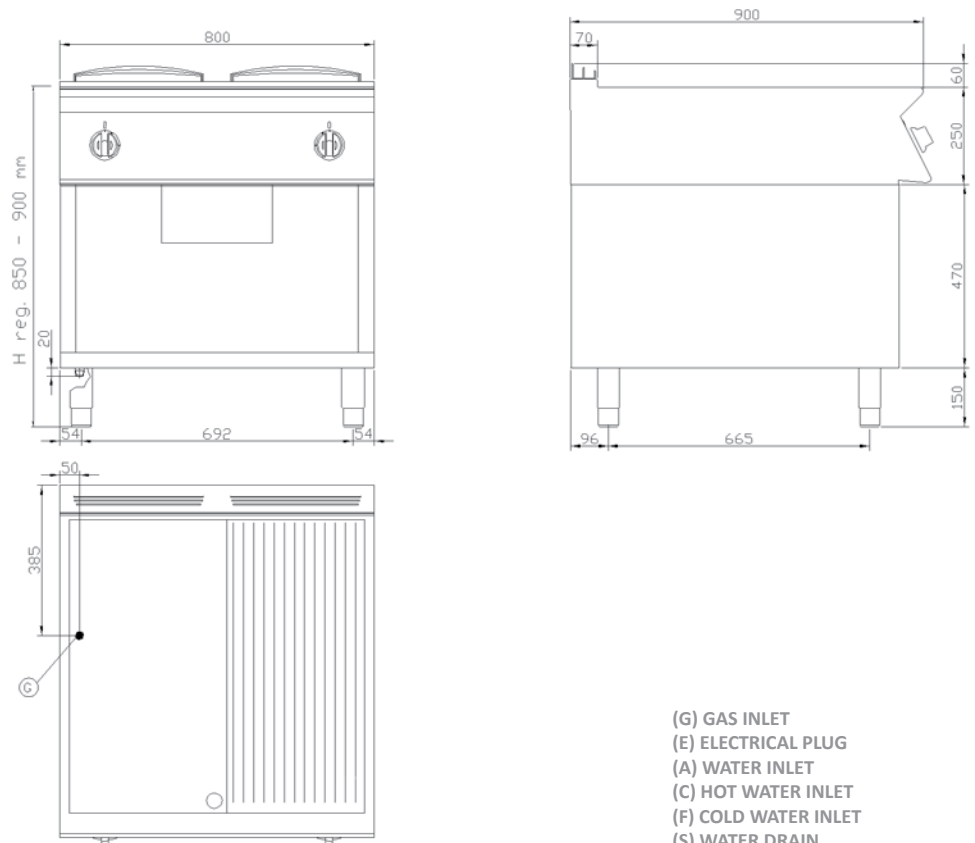

- (G) GAS INLET
 (E) ELECTRICAL PLUG
 (A) WATER INLET
 (C) HOT WATER INLET
 (F) COLD WATER INLET
 (S) WATER DRAIN