

FRE741GX

ELECTRIC FRY TOP WITH OPEN UNIT, RIBBED DUPLEX 2304 PLATE




- · Steel unit
- 1.2mm thick pressed top lowered by 3cm compared to the work surface
- Work surface adjustable from 850 to 900mm
- · Built-in plate for even cooking and ease of cleaning.
- · Ribbed Duplex 2304 plate.
- Top with drain hole and pressed fat collector GN 1/2
- · Shaped instrument panel with controls tilted toward the operator
- Heated by plated elements in incoloyWarning light on the control panel to indicate heating
- Cooking temperature controlled thermostatically from 50 to 330 °C
- Cooking surface 330x470mm

General technical data

Dimensions: (mm) 800x700x900


Volume: (m³) **0,9**


Weight:: (Kg) 120



kW **12**

Power supply voltage VAC 400/3N 50/60Hz

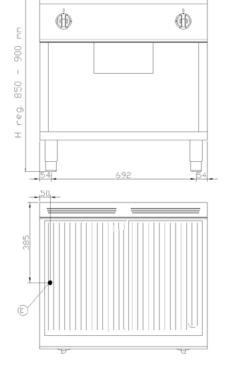



- (G) GAS INLET
- (E) ELECTRICAL PLUG
- (A) WATER INLET
- (C) HOT WATER INLET
- (F) COLD WATER INLET (S) WATER DRAIN