GB

FG7213T

13+13 Litre GAS FRYER

- Unit made of steel throughout
- 1.2mm thick pressed top
- Height-adjustable steel feet
- Steel tanks with rounded corners and pressed bottom for ease of cleaning
- Top with anti-drip edges
- Wide cool zone in the bottom for collecting cooking debris
- Chrome-plated cast brass draining tap for oil drainage in the oil collector (fitted with filter) situated in the base
- Heating elements protected by a pull-out chrome-plated grid
- High thermally efficient nickel-plated cast iron burners (approx.1 Kw/l) fitted with electrovalve.
- Thermostat temperature control (up to 190°C); fixed setting (230°C) safety thermostat to avoid overheating
- Bulbs protected for knock resistance
- Features:

1 basket per tank in case of half module
3 baskets on single module (2 half- and one single basket)
1 oil collector for each appliance

General technical data

Dimensions: (mm)	**800x700x900**
Volume: (m³)	**0,9**
Weight:: (Kg)	**100**
Gas connection	
kW	**23**
UNI ISO 7\1 R 1/2”	
Electrical connection	
kW	**0,2**
Power supply voltage	**230V/1 50Hz**

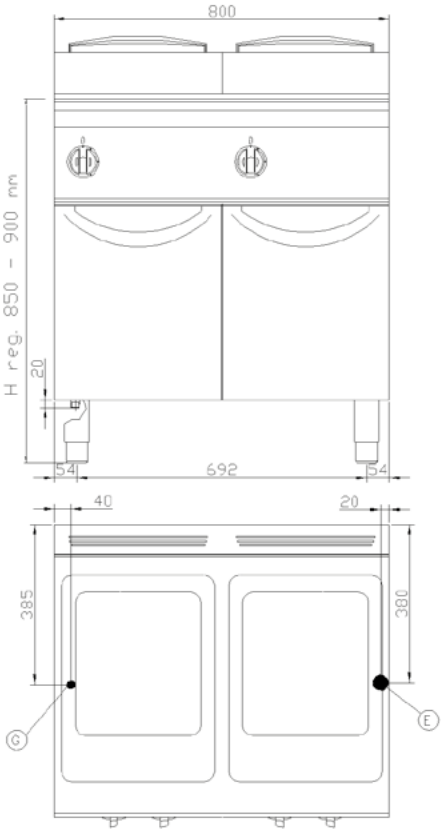

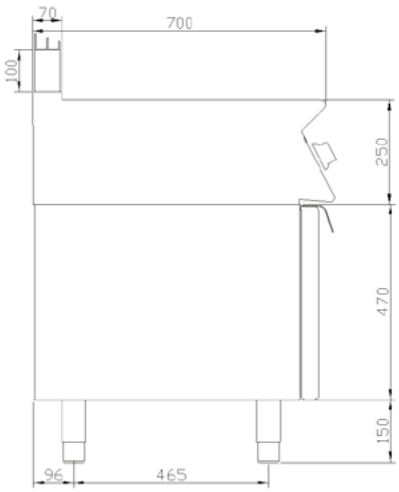

(G) GAS INLET
(E) ELECTRICAL PLUG
(A) WATER INLET
(C) HOT WATER INLET
(F) COLD WATER INLET
(S) WATER DRAIN